

LB 1002 RTX G



Classic high capacity Carpigiani machine allows you to create low overrun frozen products such as Gelato, Sorbet, Premium Ice Cream, Custard and more... Ideal for high volume Gelato production.















Performance and Quality Patented Hard-O-Dynamic technology achieves desired consistency with any batch size. Electronic controls automatically maintain product until extraction begins. Beater resists extreme hot and cold temperatures and includes auto-adjusting scrapers for complete extraction.

Convenience Automatic Control provides unparalleled flexibility and ease of operation. Audible alarm signals when product achieves desired consistency. Maximized extraction results in minimal flavor overlap with less frequent rinsing. Optional shelf mat designed to hold trays & tubs during extraction.

Savings Lowest power consumption in the industry while providing some of the quickest batch freezing times. Self-adjusting scraper can be replaced without needing a new beater. Air-cooling option avail-

Safety Automatic defrost starts during power outages to avoid damage to beater. Rounded corners reduce risk of injury to operator. Operations are done standing up for user comfort.

Hygiene Built-in faucet with flex hose makes cleaning fast and easy. Removable extraction chute for easy cleaning. Scoth-Brite treated steel is resistant to stains and fat residues. Ask your Carpigiani Sales Representative for the "Carpi Care Kit" to best maintain equipment.














LB 1002 RTX G



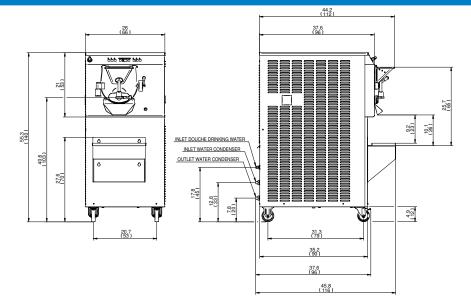

WATER

Weights	lbs.	kgs.
Net	992	450
Crated	1036	470
	cu. ft.	cu. m.
Volume	64.6	1.83
Dimensions	in.	cm.
Diriciolono		U
Width	26	66
		-

Electrical	Maximum Fuse Size	Minimum Circuit Ampacity	Poles (P) Wires (W)	
208-230/60/3 Water	80A	57A	3P, 3W	

Specifications

Electrical

A dedicated electrical connection is required. Manufactured to be permanently connected. See the Electrical chart for the proper electrical requirements. Consult your local Carpigiani distributor for cord & receptacle specifications as local codes allow.

Beater Motor

5/10 HP

Refrigeration System

R449A

Water Cooled

Water inlets and drain connections in the rear 1/2" MPT

Cylinder Capacity

37 quarts (35 liters)

All specifications mentioned must be considered approximate; Carpigiani reserves the right to modify, without notice, all parts deemed necessary. This unit may be manufactured in other electrical characteristics and may have additional regulatory agency approvals, please consult the local Carpigiani Distributor. Check name plate for exact electrical data. * Room temperature 68 °F (20 °C).

Bidding Specs										
Electrical	Volt	Hz	Ph	Neutral	☐ Yes	□ No	Cooling	☐ Air	■ Water	
Options										



738 Gallimore Dairy Road, Suite 113 High Point, NC - 27265 Toll free (800) 648 4389














www.bipiuci.it | printed 06/2022

an Ali Group Company

