



# LB 502

RTX

Classic Carpigiani machine allows you to create both high overrun frozen products such as Ice Cream, Sherbet, Water Ice and more... Ideal for the startup frozen dessert business.



**Performance and Quality** Patented Hard-O-Dynamic technology achieves desired consistency with any batch size. Electronic controls automatically maintain product until extraction begins. Beater resists extreme hot and cold temperatures and includes auto-adjusting scrapers for complete extraction. Includes separate Ice Cream and Gelato beaters for both high & low overrun Frozen Desserts.



**Convenience** Automatic Control provides unparalleled flexibility and ease of operation. Audible alarm signals when product achieves desired consistency. Maximized extraction results in minimal flavor overlap with less frequent rinsing. Optional shelf mat designed to hold trays & tubs during extraction.



**Savings** Lowest power consumption in the industry while providing some of the quickest batch freezing times. Self-adjusting scraper can be replaced without needing a new beater.



**Safety** Automatic defrost starts during power outages to avoid damage to beater. Rounded corners reduce risk of injury to operator. Operations are done standing up for user comfort.




**Hygiene** Built-in faucet with flex hose makes cleaning fast and easy. Removable extraction chute for easy cleaning. Scotch-Brite treated steel is resistant to stains and fat residues. Ask your Carpigiani Sales Representative for the "Carpi Care Kit" to best maintain equipment.



\*request the kits from your distributor to maintain your machine hygienically clean.

[carpigiani.com/us](http://carpigiani.com/us)

# LB 502 RTX

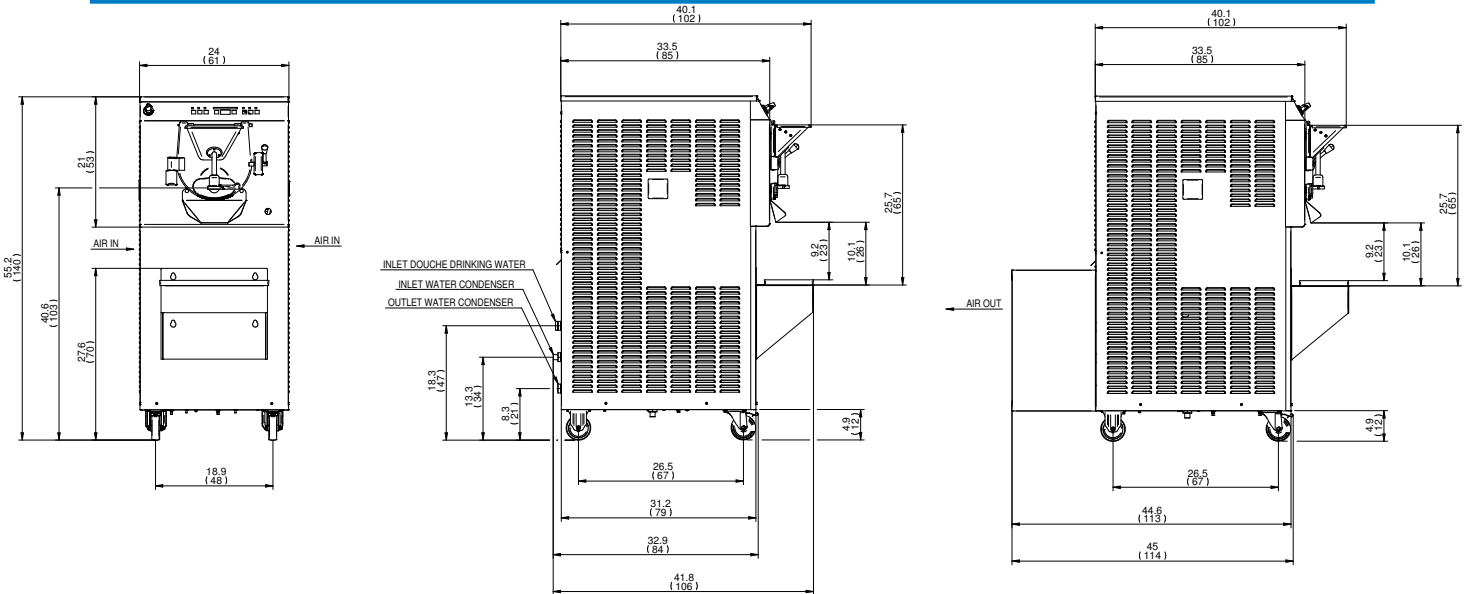

## WATER AIR

Weights	lbs.	kgs.	lbs.	kgs.
Net	648	294	648	294
Crated	749	340	760	345
Volume	cu. ft.	cu. m.	cu. ft.	cu. m.
Volume	50	1.39	49.1	1.39
Dimensions	in.	cm.	in.	cm.
Width	24	61	24	61
Depth	41.8	106	53.9	137
Height	55.2	140	55.2	140
Electrical	Maximum Fuse Size	Minimum Circuit Ampacity	Poles (P)	Wires (W)
208-230/60/1 W	50A	39A	1P,	1W
208-230/60/3 W	30A	25A	3P,	3W

## Specifications

### Electrical

A dedicated electrical connection is required. Manufactured to be permanently connected. See the Electrical chart for the proper electrical requirements. Consult your local Carpigiani distributor for cord & receptacle specifications as local codes allow.

### Beater Motor

3 HP

### Refrigeration System

R449A

### Water Cooled

Water inlets and drain connections in the rear 1/2" MPT

### Air Cooled \*

Minimum clearance: 6" (15 cm) on both side panels and 24" (60 cm) from the rear panel for proper air circulation.

### Cylinder Capacity

20 quarts (19 liters)

All specifications mentioned must be considered approximate; Carpigiani reserves the right to modify, without notice, all parts deemed necessary. This unit may be manufactured in other electrical characteristics and may have additional regulatory agency approvals, please consult the local Carpigiani Distributor. Check name plate for exact electrical data. \* Room temperature 68 °F (20 °C).

## Bidding Specs

Electrical Volt \_\_\_\_\_ Hz \_\_\_\_\_ Ph \_\_\_\_\_ Neutral  Yes  No Cooling  Air  Water

Options \_\_\_\_\_



738 Gallimore Dairy Road, Suite 113  
High Point, NC - 27265  
Toll free (800) 648 4389



www.bipiuci.it | printed 06/2022

an Ali Group Company



The Spirit of Excellence