



191 K SP

Single flavor
counter model
for neutral
or flavored
milkshakes



Performance and Quality Compact shake machine provides superior performance to other machines in the same category. It allows you to vary the overrun so that you can use any type of mix and produce special and premium shakes. Interactive display communicates with operators delivering instructions and performance data.



Convenience Compact size and rear chimney fits into most settings and can be installed next to other equipment.



Savings Direct expansion cooling cylinder optimizes refrigeration efficiency for fast freeze downtime, less waste of product, ensuring higher quality and energy savings. Dispenser is equipped with an automatic self-closing system to stop the flow of shake eliminating any waste.



Safety TEOREMA guarantees facilitated assistance by providing on-line monitoring and diagnosis on a tablet, phone or PC wherever you are.




Hygiene Hopper Agitator prevents product stratification and helps reduce foam by maintaining a fluid consistency. Cleaning is simplified thanks to cylinder heating and easy disassembly of the dispensing unit. Our automatic heat treatment system makes it possible to set the automatic heat treatment at a maximum interval of 42 days*.

*Always check with your Local Health inspector as cleaning requirements may vary.



*request the kits from your distributor to maintain your machine hygienically clean.

carpigiani.com/us

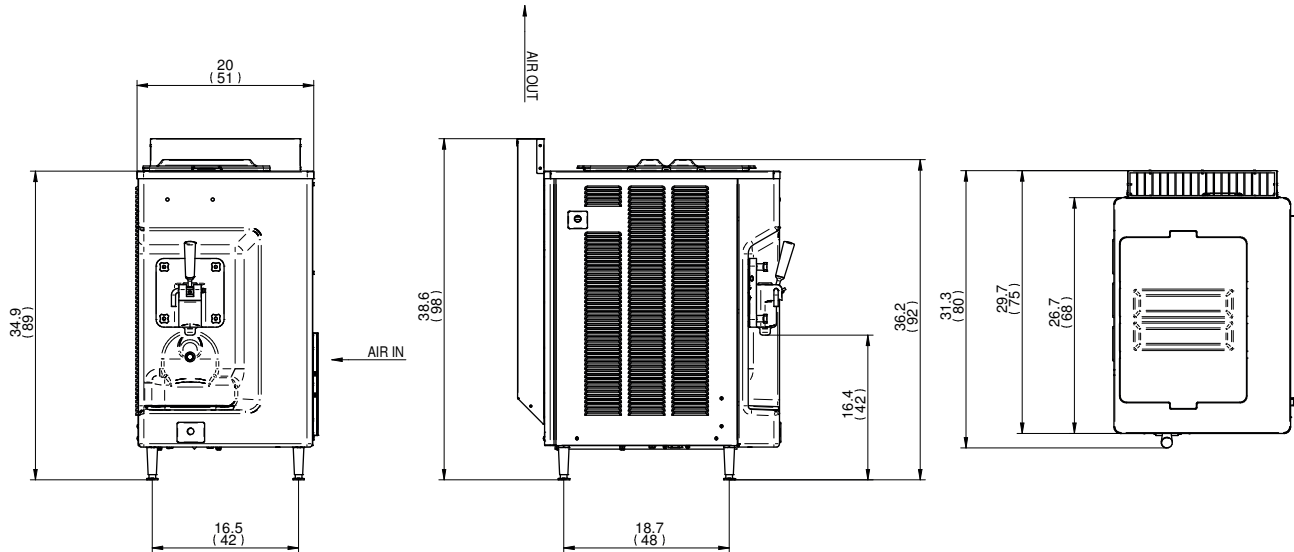

AIR

Weights	lbs.	kgs.	
Net	319	145	
Crated	368	167	
Volume	cu. ft.	cu. m.	
Volume	30.38	0.86	
Dimensions	in.	cm.	
Width	20	51	
Depth	29.7	75	
Height	38.6	98	
Electrical	Maximum Fuse Size	Minimum Circuit Ampacity	Poles (P) Wires (W)
208-230/60/3 Air	20A	15A	3P, 3W

Specifications

Electrical

A dedicated electrical connection is required. Manufactured to be permanently connected. See the Electrical chart for the proper electrical requirements. Consult your local Carpigiani distributor for cord & receptacle specifications as local codes allow.

Beater Motor

1,2 HP

Refrigeration System

R449A

Air Cooled *

Minimum clearance: 2" (5 cm) on both side panels and 0" (0 cm) from the rear panel for proper air circulation.

Hopper Capacity

18 quarts (17 liters)

All specifications mentioned must be considered approximate; Carpigiani reserves the right to modify, without notice, all parts deemed necessary. This unit may be manufactured in other electrical characteristics and may have additional regulatory agency approvals, please consult the local Carpigiani Distributor. Check name plate for exact electrical data. * Room temperature 68 °F (20 °C).

Bidding Specs

Electrical Volt _____ Hz _____ Ph _____ Neutral Yes No Cooling Air Water


Options _____



738 Gallimore Dairy Road, Suite 113
High Point, NC - 27265
Toll free (800) 648 4389



Dealer

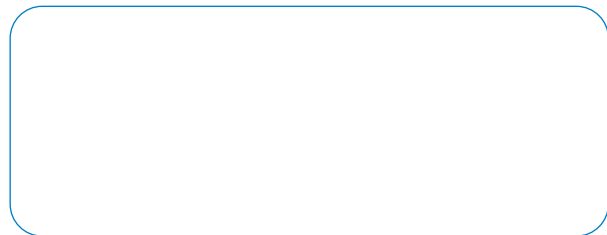

www.biplucci.it | printed 06/2022

an Ali Group Company



The Spirit of Excellence