

Turbomix

The ultimate vertical blender designed for the frozen dessert and pastry laboratory





λ

Performance and Quality Variable Speed motor is comfortably controlled by hand controls. Blender can be moved vertically and in 360° circular motions. Turbomix comes with two cutters plus an optional cutter. • Cream Emulsifier - Quickly emulsifies dairy and oily ingredients into creamy mixtures or base mix. • Fruit Emulsifier - Great for chopping & mixing pieces of fresh or frozen fruit puree into a base. It is also ideal for blending sugars and powdered ingredients for water-based mixtures. • Optional Cutter - The rotary blender can cut large pieces of fruit such as whole pears and apples. Transforms blended fruit into a fine puree.

Convenience Immersion blender stands alone for ultimate comfort and ease of use. Desired mixing time can be set, allowing Turbomix to finish production autonomously. Optional Steel bucket available.

Safety Activated by 2-handed control sensor.

Hygiene Emulsification blades can be taken apart and cleaned completely.






*request it from your dealer to always keep your machine hygienically perfect.


carpigiani.com/us





06/2021





500

Weights	lbs	lbs. kgs.			
Net	143	.3	65		
Crated	16	5	75		
	cu.	ft. c	:u. m.		
Volume	1.3	5	0.41		
Dimensions	in		cm.		
Width	17.	3	44		
Depth	19.	7	50		
Height	29.9 -	44.9 76	76 - 114		
Electrical	Maximum Fuse Size	Minimum Circuit Ampacity	Poles (P) Wires (W)		
230/50-60/1	10A	10A	1P, 1W		

Specifications

Electrical

A dedicated electrical connection is required. Manufactured to be permanently connected. See the Electrical chart for the proper electrical requirements. Consult your local Carpigiani distributor for cord & receptacle specifications as local codes allow.

445

Motor RPM

3.000 - 12.000


Rotor Speed approx 22 m/sec

Minimum Quantity per Cycle 0.79 gal (3 liters)

Maximum Quantity per Cycle 3.96 gal (15 liters)

All specifications mentioned must be considered approximate; Carpigiani reserves the right to modify, without notice, all parts deemed necessary. This unit may be manufactured in other electrical characteristics and may have additional regulatory agency approvals, please consult the local Carpigiani Distributor. Check name plate for exact electrical data. * Room temperature 68 °F (20 °C).

Bidding Specs									
Electrical	Volt	Hz	Ph	Neutral	🛛 Yes	🗆 No	Cooling	🗅 Air	Water
Options									

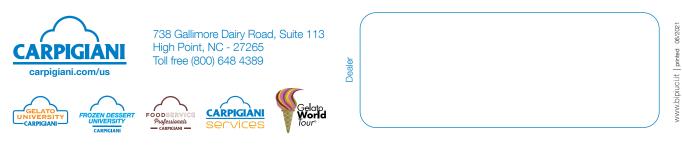

an Ali Group Company

